




The Crossbar Bike Stand


Ex. VAT: £95.00 **TOTAL**
Inc. VAT: **£114.00**

*Base price, not including any custom options.

Product Images

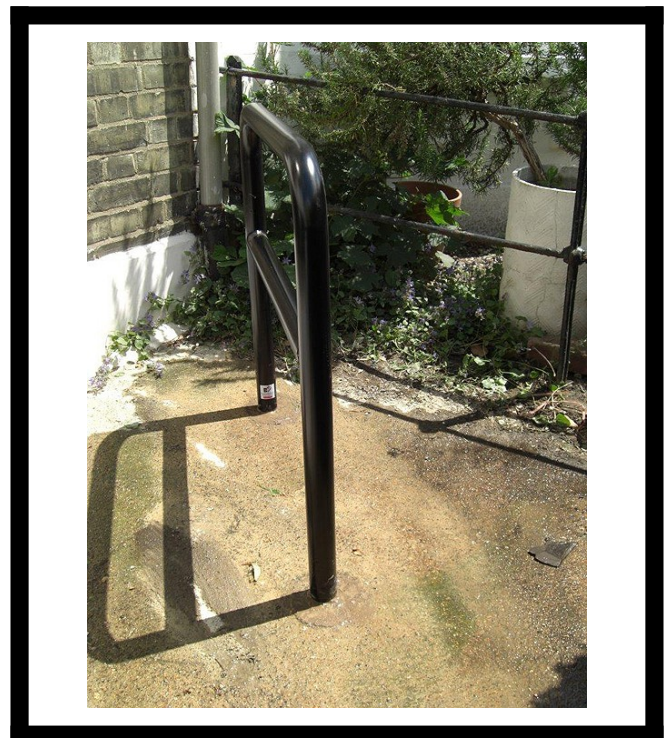

Overground Fix




Requires 8xM10
RAWL Expanding
Security Bolts per Bike
Stand (available in
options)

Overground fixing is ideal for very hard
surfaces e.g. concrete.

For easier and quicker to install,
we recommend using expanding
M10 RAWL bolts (available).

Underground Fix



Underground fixing is ideal for soft
surfaces e.g. tarmac, block paving,
paving slabs.

Dig a hole 250x250mm and fill with
the bike stand. Then add concrete.



Description

A high security bike stand, offering the ability for all cycles and sizes to be locked with both the front wheel and the frame. Also double as a tapping bar if being installed onto public areas.

Specification

- Mild Steel construction
- This bike stand can help contribute towards gaining 2x ENE8 Cycle storage credits when used in the appropriate situation, under the Code for Sustainable Homes
- Underground fixing dimensions: 750mm wide x 1050mm tall. Baseplate: 60mm x 60mm. 50mm tube o/d diameter, 2.5mm wall thickness. Approx weight: 10Kg.

Code: BS6 2152

Delivery time: Typically 3 to 5 working days (up to quantities of 10)

Additional Information

Best Sellers M2

No

Additional Options

Choose Finish	Polyester powdercoated - black	£0.00
	Mild steel, Galvanised	£0.00
	Stainless Steel	£30.00
Choose Fixing	Overground fixing including bolts	£23.01
	Underground	£0.00
	Overground	£5.50

