






Black & Galvanised Sheffield Bike Stand


£63.59

Excl. VAT: £52.99

Product Images

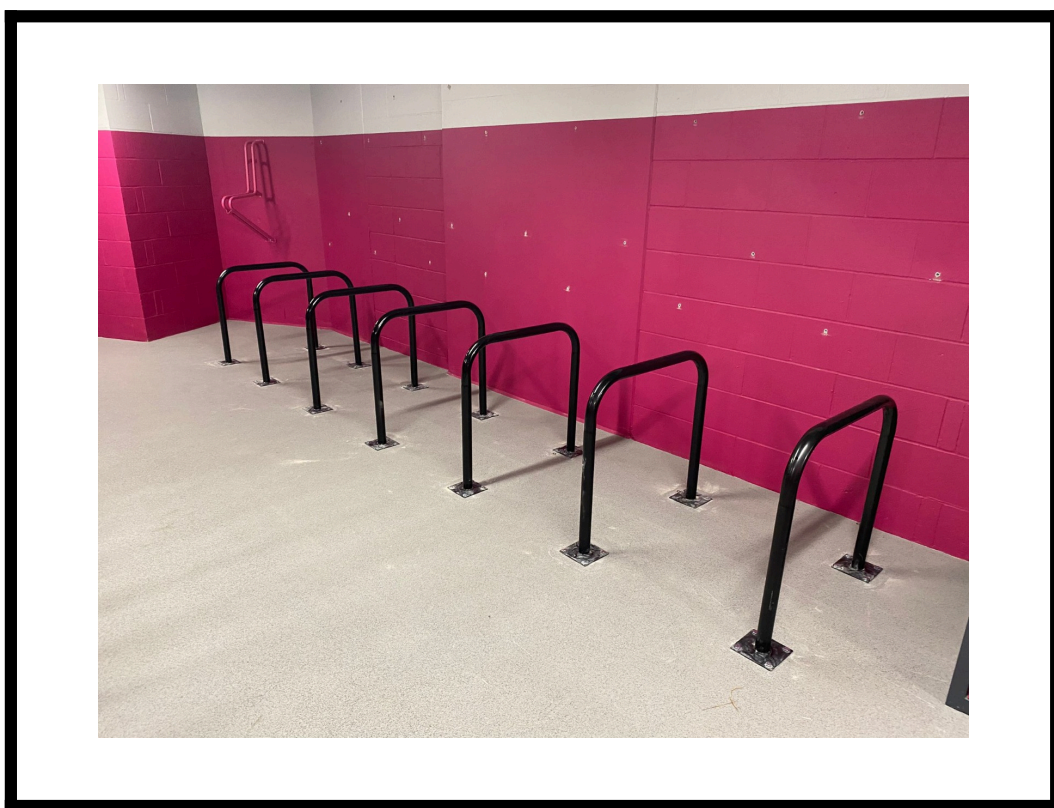

Overground Fix




Requires 8xM10
RAWL Expanding
Security Bolts per Bike
Stand (Available in
options)

Overground fixing is ideal for very hard
surfaces e.g. concrete.

Far easier and quicker to install.
we recommend using expanding
M10 RAWL bolts (available).

Underground Fix



Underground fixing is ideal for soft
surfaces e.g. tarmac, block paving,
paving slabs.

Dig a hole 250x250mm and fill with
the bike stand. Then add concrete.

Description

The classic and popular design is perfect for those seeking great value, low maintenance and minimalist bike parking. The shape allows the bike frame & wheel to be securely locked onto the cycle stand.

The Black Galvanised Traditional Sheffield Bike Stand is a robust and stylish solution for bike parking. Galvanised for rust resistance and powder-coated in black, it offers enhanced durability and aesthetics. This stand is ideal for secure bike parking in various environments, combining functionality with a sleek design.

Options:

The Black and Galvanised Sheffield stand can be purchased with overground or underground (with or without bolts) fixing.

Specification:

- Mild Steel construction, Galvanised undercoating for rust protection, and Polyester Powder Coated RAL 9005 on top, Jet Black
- Exclusive supplier to Transport for London for secure bike storage and Local Authorities across the UK
- This bike stand can help contribute towards gaining 2x ENE8 Cycle storage credits when used in the appropriate situation under the Code for Sustainable Homes
- Overground (bolt-down) fixing or Underground (flanged) fixing
- Overground fixing dimensions: 750mm wide x 750mm tall. Baseplate: 150mm x 150mm with 8 x M12 size holes total. 50mm tube o/d diameter, 2.5mm wall thickness. Approx. weight: 8 kg. Unlike most bike stands that only come with 4 bolt holes, the Traditional Sheffield Bike Stand has 8 for added security.
- Underground fixing dimensions: 750mm wide x 1000mm tall. Baseplate: 60mm x 60mm. 50mm tube o/d diameter, 2.5mm wall thickness. Approx. weight: 8 kg
- Recommended spacing of 750mm between each bike stand
- Fixing bolts: 8 M12 RAWL Bolts required per bike stand (No bolts required for concrete in option)
- Finishing can be galvanised and polyester powder coated black

Sheffield Bike Rack Revit / CAD Files

[Download our CAD files](#) or contact us for help with planning. We also have an in-house designer who can check and assist with any architectural drawings free of charge.

Code: BS1 2122

[Galvanised Sheffield Stand Product Page](#)

Delivery time:

Typically 4 to 5 working days

Additional Options

Choose Fixing	Underground	£0.00
	Overground with Installations Bolts	£16.50
	Overground	£4.40

